



GORILLA GUARD®

HIGH PERFORMANCE
PREMIUM
GLASS-REINFORCED
FELT

SHINGLE UNDERLAYMENT



DATA SHEET

Similar Cost Per Square to #30 Felt.



Gorilla Guard® Product Description

Gorilla Guard® high performance underlayment for steep slope roof applications. Made to order for the true professional. Contractors across the country told us what they wanted in a high quality underlayment. We utilized new technology to create an underlayment with high performance features that out-performs typical organic felt by adding glass fibers. You'll save time – and labor costs – by using the right product the first time.

- Meets ASTM D 6757 criteria for reinforced underlayments
- Meets performance criteria of ASTM D 4869 Type I and Type III, ASTM D 226 Type I (#15 & #30 Standard)
- Convenient four square coverage rolls; less waste and less handling
- UL Classified as roofing accessory
- Glass fiber reinforced, organic felt underlayment
- Strong/tough
- Lays flatter on deck in wet conditions
- Highly resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Resists tear away from fasteners when walked on or in strong wind when properly installed
- Meets shingle underlayment requirements for the Atlas Signature Select® roofing system
- Better quality product than typical #30 Saturated Felt at similar cost per square
- Florida Building Code Approved - FL 11915

**UPGRADE
THE JOB
NOT THE
PRICE**



Atlas offers homeowners increased coverage of their Premium Protection Period on any Atlas Signature Select® Roof System. This product qualifies for use in an Atlas Signature Select® Roofing System when used in combination with other qualifying Atlas products. For more information please visit www.atlassignatureselect.com

www.ATLASROOFING.com



GORILLA GUARD®

HIGH PERFORMANCE PREMIUM GLASS-REINFORCED FELT

SHINGLE UNDERLAYMENT



DATA SHEET

Installation

Gorilla Guard® shall be applied to a properly prepared dry deck that is smooth, clean and free from any depressions, projections, or protruding nails. Roof decks shall be structurally sound and meet or exceed minimum requirements of the deck manufacturer and local codes.

Always lay the Gorilla Guard® parallel to the eaves, lapping each course at least 2" over the underlying course. Apply the drip edge underneath the Gorilla Guard® along the eaves and over the Gorilla Guard® along the rakes. Gorilla Guard® should never be applied perpendicular to the eaves. Secure the Gorilla Guard® with fasteners every 12" across the lower and upper edge to hold it in place. If more than one piece is required to continue a course, lap the ends at least 4". End laps in succeeding courses should be located at least 6' from end laps in the preceding course. Lap the Gorilla Guard® a minimum of 6" from both sides over all hips, ridges and valleys. Where a roof meets a vertical surface, carry the underlayment at least 4" up the surface.

On decks having a slope greater than 4" per foot, one layer of Gorilla Guard® should be applied. Some local codes may require specific underlayments. On slopes 2" to 4"

per foot apply a double layer of Gorilla Guard® over the entire deck surface. Starting with a 19" wide strip at eaves, overhanging the eaves 1/4" to 3/8", cover with full 36" strips providing a 17" exposure. Continue with 36" strips lapping each course 19" over the preceding course. End laps for low slopes shall be 12" and staggered 6' apart.

The use of Gorilla Guard® along with the proper decking materials and shingles will help in meeting Class A and or Class C Fire ratings. A shingle by itself is not fire-rated, although it is part of the roofing assembly.


Storage

KEEP ROLLS DRY AND COMPLETELY PROTECTED FROM THE WEATHER. If work is to be done in cold weather, rolls of roofing should be placed in a warm place for 24 hours prior to application.


***Tip: Cut Gorilla Guard® into manageable lengths for safety on the roof.**

Applications

Steep Slope Underlayment Installation

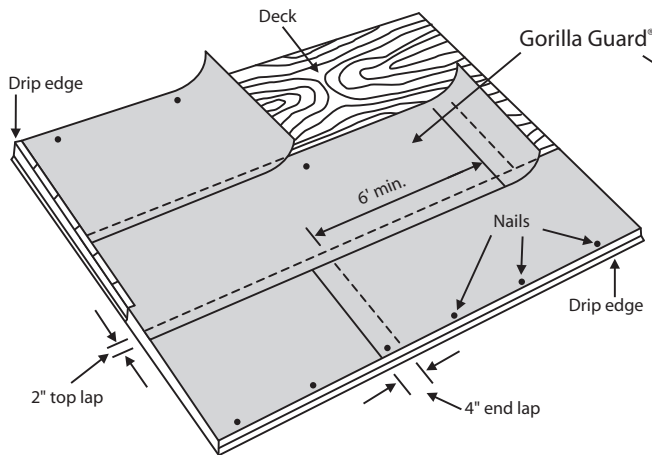

Low Slope Application (Double Coverage)

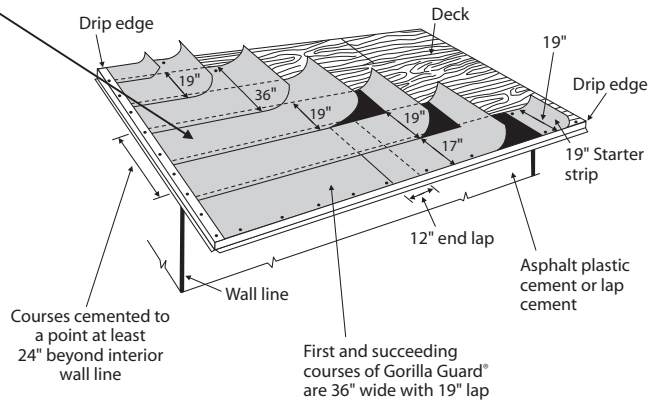

Technical Data

Technical Data			
	Coverage w/ 2" Lap	Roll Size	Rolls Per Pallet
Gorilla Guard®	400 sq. ft.	3' x 141.5'	36

For more information:

Ardmore, OK
2300 South Veterans Blvd.
Ardmore, OK 73401
Tel: (800) 261-2852
Fax: (580) 223-6894

Daingerfield, TX
1100 Georgia Pacific Drive
Daingerfield, TX 75638
Tel: (800) 270-2852
Fax: (903) 645-2291

Franklin, OH
675 Oxford Road
Franklin, OH 45005
Tel: (800) 260-2852
Fax: (937) 746-6040

Hampton, GA
100 Pine View Drive
Hampton, GA 30228
Tel: (800) 251-2852
Fax: (770) 946-5249

Meridian, MS
2322 Valley Road
Meridian, MS 39302
Tel: (800) 933-2721
Fax: (601) 483-7344

Meets the PERFORMANCE requirements of
ASTM D 4869 TYPE I & III, D 226 TYPE I, D 6757
Florida Building Code Approved - FL 11915



Corporate Sales & Marketing

2000 RiverEdge Parkway
Suite 800
Atlanta, GA 30328

www.ATLASROOFING.com